


CKCL22X7R1H102M085AA TDK item description : CKCL22X7R1H102MT****)

Applications  Commercial Grade

Feature  2 in 1 Array

Series CKCL22(2012) [EIA CC0805]

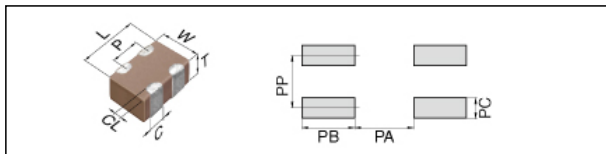

Size	
Length(L)	2.00mm +/-0.15mm
Width(W)	1.25mm +/-0.15mm
Thickness(T)	0.85mm +/-0.15mm
Terminal Width(C)	0.45mm Min.
Terminal Spacing(P)	1.00mm Min.
Recommended Land Pattern(PA)	0.55 to 0.65mm
Recommended Land Pattern(PB)	0.55 to 0.65mm
Recommended Land Pattern(PC)	0.40 to 0.50mm
Recommended Land Pattern(PP)	0.95 to 1.05mm


Electrical Characteristics	
Capacitance	1nF +/-20%
Rated Voltage	50Vdc
Temperature Characteristic	X7R(+/-15%)
Dissipation Factor	3% Max.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	4000Pcs Min.


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CKCL22X7R1H102M085AA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

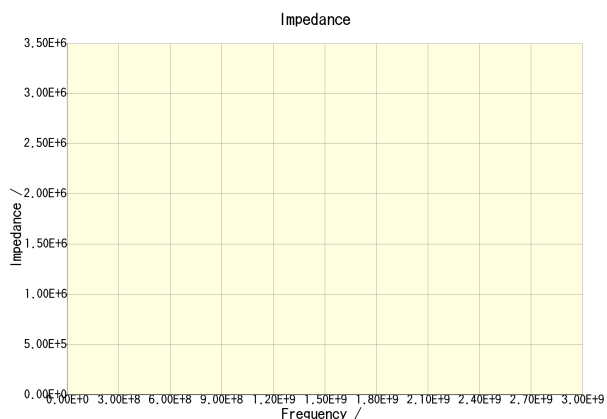


CKCL22X7R1H102M085AA

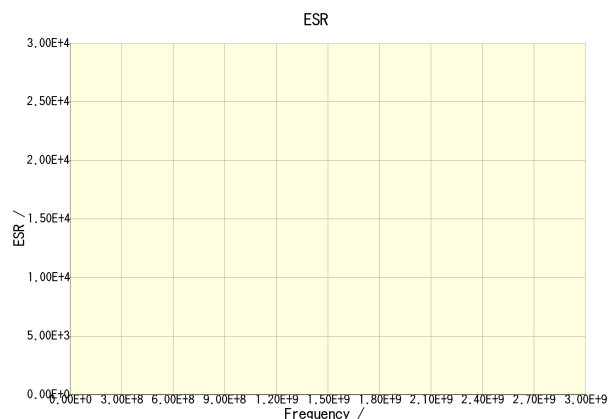


CKCL22X7R1H102M085AA

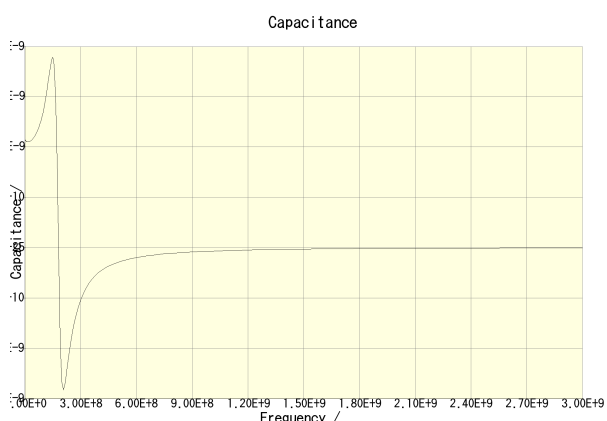


CKCL22X7R1H102M085AA

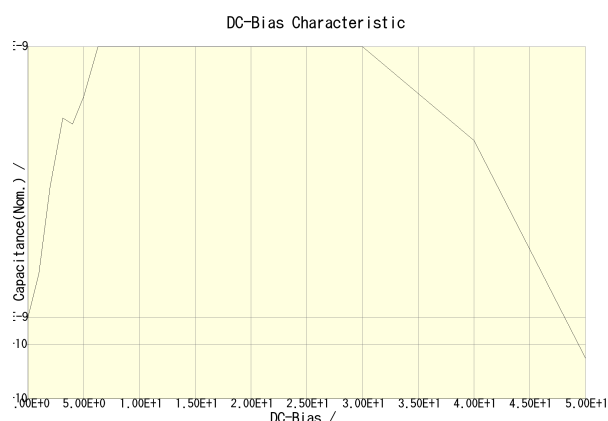

CKCL22X7R1H102M085AA

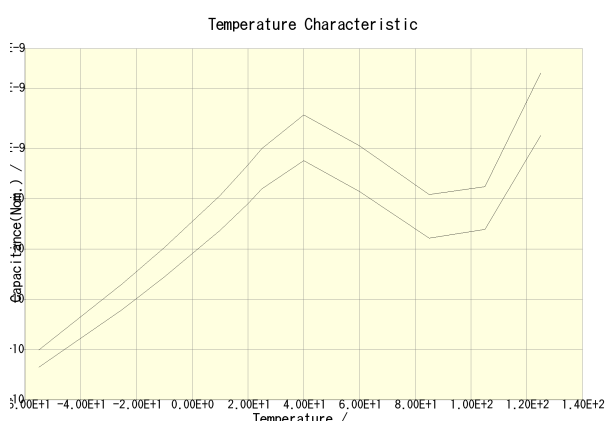

CKCL22X7R1H102M085AA(DC Bias = 0V) CKCL22X7R1H102M085AA(DC Bias = 25V)

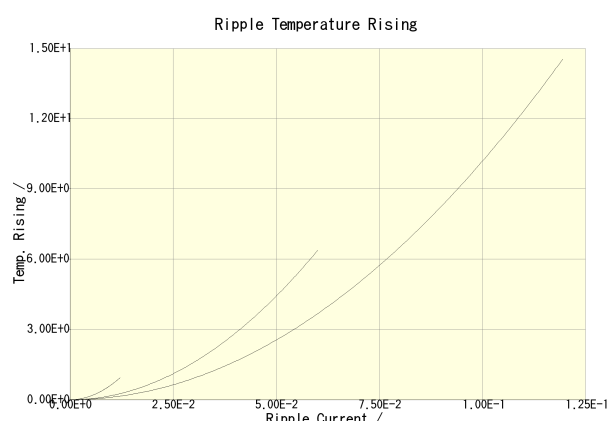

CKCL22X7R1H102M085AA(100kHz) CKCL22X7R1H102M085AA(500kHz)
CKCL22X7R1H102M085AA(1MHz)

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.