
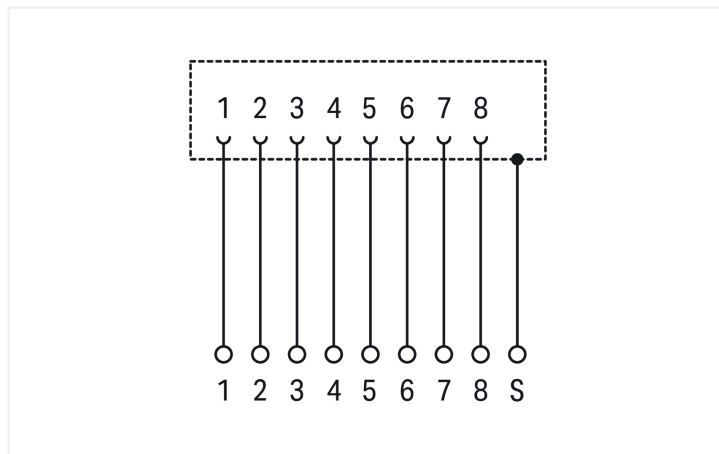


Data Sheet | Item Number: 289-175/790-108

Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle

<https://www.wago.com/289-175/790-108>

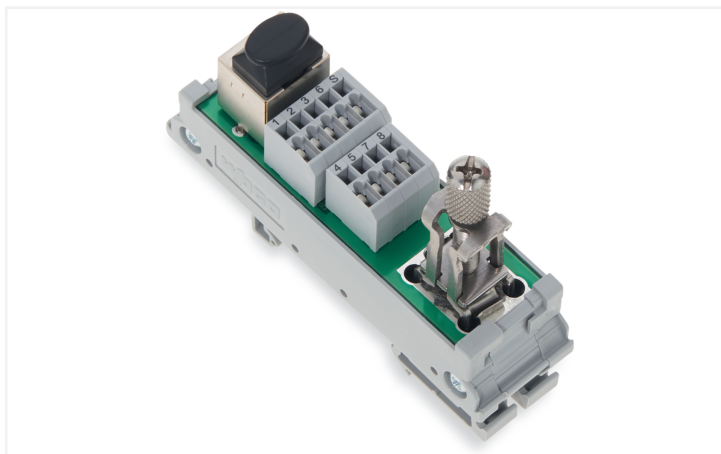

Electrical data

Nominal current	1.5 A
Insulation resistance	≥ 500 MΩ
Specialty functions	With shield connection With shield clamping saddle

Safety and protection

Dielectric strength (contact/contact) (AC, 1 min)	1 kVrms
---	---------

Connection data

Mating cycles	500
Transmission length (max.)	100 m
Connection Cable	Cat. 5 (min.)
WAGO shield clamping saddle	11 mm wide; cable diameter up to 8 mm

Connection 1

Pluggable connector	RJ-45 (shielded)
Pole number 1	8
Connection type 1	System

Connection 2

Design 2	PCB terminal blocks (double-row)
Pole number 2	9
Connection type	System
Connection technology	CAGE CLAMP®
WAGO connector 2	WAGO 739 Series
Solid conductor	0.08 ... 1.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 1.5 mm ² / 28 ... 14 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	24 mm / 0.945 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	40 mm / 1.575 inches

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier
Mating cycles	500

Material data

Fire load	0.776 MJ
Weight	49 g

Environmental requirements

Ambient temperature (operation)	-40 ... +85 °C (Actuation: -35 ... +85 °C)
Ambient temperature UL (operation at U _N)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	≤ 85 % (non-condensing)

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454317539
Customs tariff number	85366990990

Product classification

UNSPSC	39121421
--------	----------

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
289-175/790-108



Documentation

Instruction Leaflet

Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	
---	-----------------------	-------------------	--

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent



Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-719

Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft