


product data sheet

item no. 5D.204.7055.0

multi-tier terminal WTPN 4 E

multi-tier terminal WTPN 4 E rated voltage 500 V, rated current 28 A, push-In connection//true, number of levels 2, number of clamp positions per level 2, nominal cross section 4 mm², connectable conductor cross section fine stranded without cable end sleeve 0,2mm² - 4mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 6.1 mm, inflammability class of insulation material acc. with ul94 V0

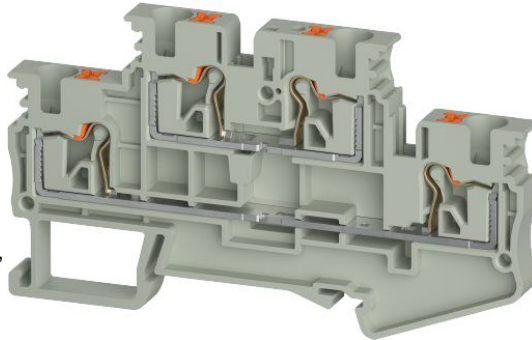

item no.	5D.204.7055.0
EAN	4049088706752
order unit	50 piece(s)

certificates / approvals



technical data

general

nominal cross section	4 mm ²
color	grey
number of levels	2
number of clamp positions per level	3
width/grid dimension	6.1 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
terminal blocks for electrical installations	yes
Anschlussart	push-In connection//true
Anzahl der Klemmstellen je Etage	3
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0
Reihenklemmen für Installationsverteiler	yes

technical data

rated current	28 A
rated voltage	500 V
rated impulse voltage	6 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	48.7 mm
width	6.1 mm
height	49.3 mm

connection data

connection type	push-In connection//true
connection type 1	plug-in connection
minimum cross section solid	0.2 mm ²
maximum cross section solid	6 mm ²
minimum cross section fine stranded	0.2 mm ²

maximum cross section fine stranded	4 mm ²
minumum conductor cross section (flex., stranded) with cable end sleeve	0.25 mm ²
maximum conductor cross section (flex., stranded) with cable end sleeve	4 mm ²
wire strip length	12 mm

technical data UL/CSA

cross section UL	24-10 AWG
voltage UL	300 V
current factory wiring	30 A
current field wiring	30 A
cross section CSA	24-10 AWG
voltage CSA	300 V
current CSA	30 A

