


product data sheet

item no. 5D.S95.1655.0

high current terminal WRTN 95 U

high current terminal WRTN 95 U rated voltage 1500 V, rated current 232 A, bolt connection, number of levels 1, number of clamp positions per level 2, nominal cross section 95 mm², connectable conductor cross section fine stranded without cable end sleeve 2,5mm² - 95mm², mounting method DIN rail (top hat rail), color grey, width/grid dimension 32 mm, inflammability class of insulation material acc. with ul94 V0

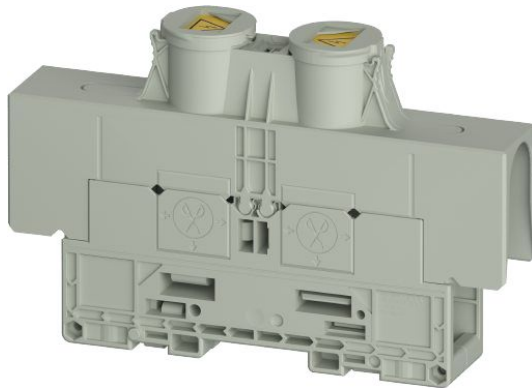

item no.	5D.S95.1655.0
EAN	4049088725708
order unit	10 piece(s)

certificates / approvals



technical data

general

nominal cross section	95 mm ²
color	grey
number of levels	1
number of clamp positions per level	2
width/grid dimension	32 mm
insulating housing	PA
inflammability class of insulation material acc. with UL94	V0
mounting method	DIN rail (top hat rail)
Anschlussart	bolt connection
Anzahl der Klemmstellen je Etage	2
Montageart	DIN rail (top hat rail)
Brennbarkeitsklasse des Isolierstoffs	V0

technical data

rated current	232 A
rated voltage	1000 V
rated impulse voltage	8 kV
closing plate required	no
length	132 mm
width	32 mm
height	62.6 mm

connection data

connection type	bolt connection
connection type 1	screw connection
minimum cross section solid	2.5 mm ²
maximum cross section solid	95 mm ²
minimum cross section fine stranded	2.5 mm ²
maximum cross section fine stranded	95 mm ²
torque conductor mounting	10 Nm

technical data UL/CSA

cross section UL	14-4/0 AWG
voltage UL	1500 V
current factory wiring	230 A
current field wiring	230 A
cross section CSA	14-4/0 AWG
voltage CSA	
current CSA	230 A

