

292253-8 ✓ ACTIVE

AMP CT


TE Internal #: 292253-8

PCB Mount Header, Right Angle, Wire-to-Board, 8 Position, 2 mm [.079 in] Centerline, Partially Shrouded, Tin (Sn), Through Hole - Solder, AMP CT

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles > CT 2mm Header Assembly: Right Angle

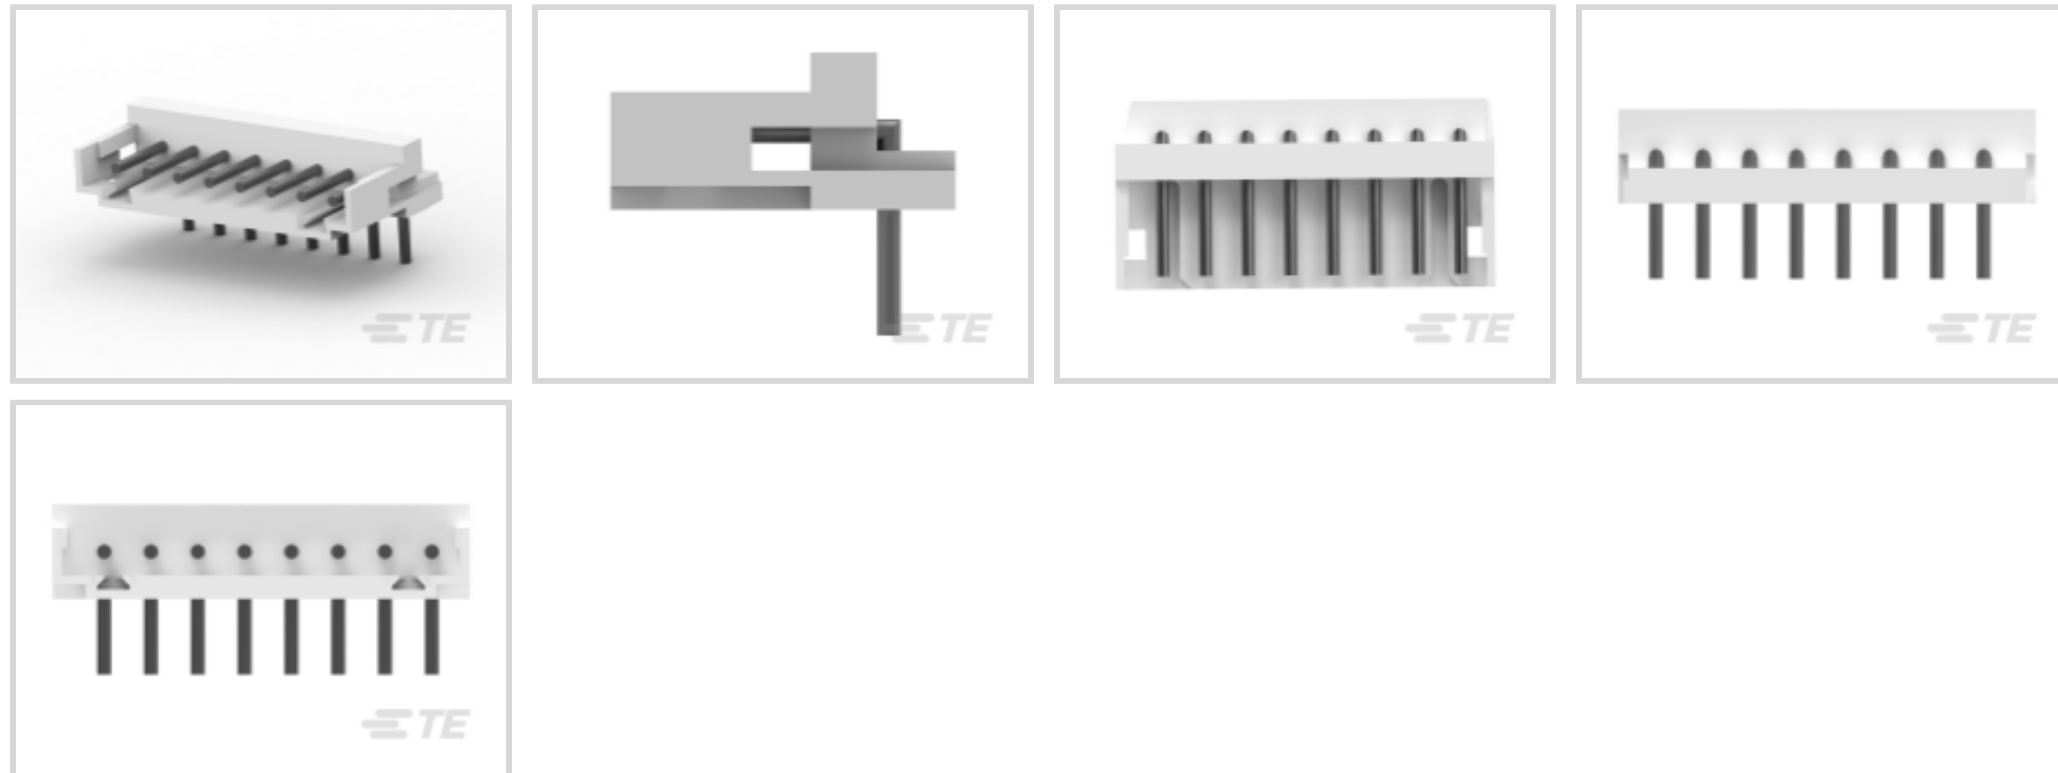

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **8**

Centerline (Pitch): **2 mm [.079 in]**

[All CT 2mm Header Assembly: Right Angle \(170\)](#)

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| PCB Connector Type | PCB Mount Header |
| Connector System | Wire-to-Board |
| Header Type | Partially Shrouded |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |
| Connector Product Type | Connector Assembly |

Configuration Features

| | |
|-----------------------|-------------|
| PCB Mount Orientation | Right Angle |
| Number of Positions | 8 |
| Number of Rows | 1 |

Electrical Characteristics

| | |
|-------------------|---------|
| Operating Voltage | 125 VDC |
|-------------------|---------|



Body Features

| | |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

Contact Features

| | |
|---------------------------------------------------------|--------------------------|
| Mating Pin Diameter | .6 mm[.024 in] |
| PCB Contact Termination Area Plating Material Thickness | 1 μ m[39.37 μ m] |
| Contact Shape & Form | Round |
| Contact Layout | Inline |
| Contact Mating Area Length | 4.5 mm[.177 in] |
| Contact Base Material | Brass |
| Contact Mating Area Plating Material | Tin (Sn) |
| Contact Mating Area Plating Material Finish | Matte |
| Contact Mating Area Plating Material Thickness | 1 μ m[39.37 μ m] |
| Contact Type | Pin |
| Contact Current Rating (Max) | 4 A |
| PCB Contact Termination Area Plating Material | Tin |

Termination Features

| | |
|----------------------------------|-----------------------|
| Termination Post & Tail Diameter | .6 mm[.024 in] |
| Termination Post & Tail Length | 3.2 mm[.126 in] |
| Termination Method to PCB | Through Hole - Solder |

Mechanical Attachment

| | |
|--------------------------|---------------|
| Mating Retention Type | Detent Window |
| Mating Alignment Type | Polarization |
| PCB Mount Retention Type | Kinked Legs |
| PCB Mount Alignment | Without |
| Mating Retention | Without |
| PCB Mount Retention | With |
| Connector Mounting Type | Board Mount |
| Mating Alignment | With |

Housing Features

| | |
|--------------------|---------------|
| Centerline (Pitch) | 2 mm[.079 in] |
| Housing Material | Nylon 6/6 |

Dimensions

| | |
|--|--|
| | |
|--|--|



| | |
|-----------------------------|-----------------------|
| Connector Width | 4 mm[.157 in] |
| PCB Thickness (Recommended) | .8 mm[.031 – .063 in] |
| Connector Height | 8.8 mm[.346 in] |
| Connector Length | 17.8 mm[.701 in] |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|--------------------------|----------------------|
| Assembly Process Feature | Pick and Place Cover |
| Circuit Application | Power & Signal |

Industry Standards

| | |
|---------------------------------------------|-----------------------|
| Compatible With Agency/Standards Products | CSA, UL |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0 |

Packaging Features

| | |
|--------------------|----------|
| Packaging Quantity | 500 |
| Packaging Method | Bag, Box |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Wave solder capable to 265°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM7017-C7671
Common Termination Contacts — POWER TRIPLE LOCK



TE Part # 2405869-8
CT 8P 300MM CABLE ASSEMBLY 2-179228-8




TE Part # CAT-AM7017-H8172
AMP COMMON TERMINATION HOUSINGS


Also in the Series | AMP CT



Connector Contacts(8)

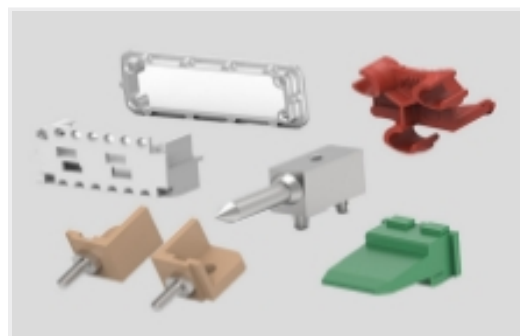

Connector Hardware(39)

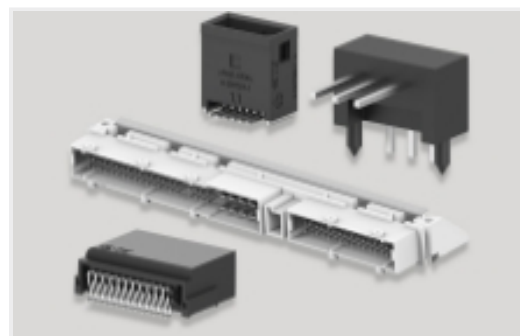

PCB Headers & Receptacles(739)



Rectangular Connector Housings(74)




Rectangular Power Connectors(883)



Standard Rectangular Connectors(228)



Wire-to-Board Connector Assemblies & Housings(165)

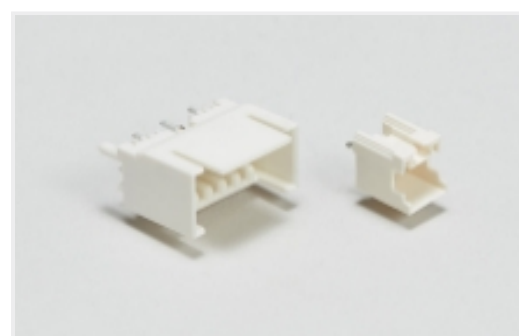

Wire-to-Board Headers & Receptacles (739)

Customers Also Bought



TE Part #3-173977-2
CT CONN MT REC ASSY 12P BLUE



TE Part #292161-8
CT P/HDR ASSY V 8P W/KINK NAT



TE Part #1-292161-2
CT P/HDR ASSY V 12P W/KINK NAT



TE Part #CAT-3980407-RHDRRA
CT 2mm Header Assembly: Right
Angle



TE Part #353293-7
MINI CT MT REC ASSY 7P GRAY



TE Part #2-2176230-4
3522 68R 5% 3W

Documents

Product Drawings

[CT CONN MT HDR ASSY H 8P NAT](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_292253-8_B1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_292253-8_B1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_292253-8_B1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Workmanship Specification](#)

English