

## Interface module - VIP-3/PT/HD44SUB/F - 2904274

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connections and high density D-SUB miniature socket-strip, for mounting on NS 35 rails, no. of pos.: 44

The figure shows a 44-pos. version, with pin strip



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	224.6 g
Custom tariff number	85369010
Country of origin	United States

### Technical data

#### Dimensions

Width	82.5 mm
Height	75.8 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	44
Status display	No
Mounting position	any

## Interface module - VIP-3/PT/HD44SUB/F - 2904274

### Technical data

#### General

Standards/regulations	EN 50178
Rated surge voltage	1.2 kV
Degree of pollution	2
Overvoltage category	II

#### Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12
Number of positions	26

#### Connection data for connection 2

Connection name	Controller level
Connection method	High-density D-SUB socket strip
Number of connections	1
Number of positions	44

#### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	EN 50178
Degree of pollution	2
Overvoltage category	II

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

# Interface module - VIP-3/PT/HD44SUB/F - 2904274

## Classifications

### ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Approvals

### Approvals

---

#### Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

---


#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

CSA 	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	1 A
Nominal voltage U <sub>N</sub>	105 V

# Interface module - VIP-3/PT/HD44SUB/F - 2904274

## Approvals

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	1 A
Nominal voltage U <sub>N</sub>	125 V


cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	1 A
Nominal voltage U <sub>N</sub>	125 V

EAC


cULus Recognized

## Drawings

Circuit diagram

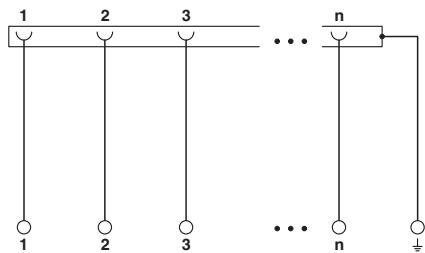

Schematic diagram



Universal circuit diagram